


## MLS-X1

Scalable and Reconfigurable Live Production Processor/Switcher

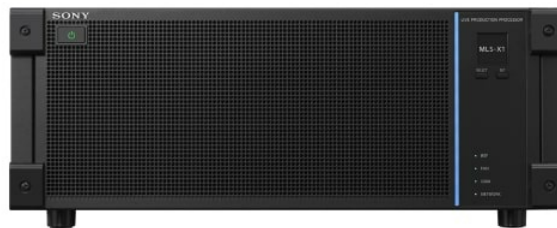

**NETWORKED LIVE**

### Specifications

#### General

Power Requirement	AC 100 V to 127 V, 50/60Hz AC 200V to 240 V, 50/60Hz
Power Consumption	100 V to 127 V : 13 A to 10.2 A 200 V to 240 V : 6.5 A to 5.4 A (when equipped with all installable option boards)
Operating Temperature	5 °C to 40 °C (41 °F to 104 °F)
Storage Temperature	- 20 °C to 60 °C (- 4 °F to 140 °F)
Operating Humidity	10 % to 90 %
Dimensions (W x H x D)	440 x 176 x 583 mm (17 3/8 x 7 x 23 inches)
Mass	Approx. 28 kg (61 lb 5 oz) (when equipped with all installable

option boards)

## Video Inputs/Outputs \*1

Inputs (SDI) (100G IP)	64 for primary inputs
Outputs (100G IP)	64 for assignable outputs
Outputs (SDI)	32 for assignable outputs
Signal Format	SMPTE ST 2110
Signal Processing	4:2:2 digital component
Quantization	12G/3G/HD : 10-bit

## Reference

Reference Input	BNC (x2), 75 $\Omega$ with loop-through output HD tri-level sync or Analog black burst
Reference Output	BNC (x1), 75 $\Omega$ output HD tri-level sync or Analog black burst *2

## Control

LAN 1	RJ-45 (x1), 1000BASE-T
LAN 2	RJ-45 (x1), 1000BASE-T
GPI	D-sub 25-pin (x1), open collector

	outputs 16 ch, 3.3V TTL inputs 6ch
USB	USB 2.0 (x2), USB 3.0 (x2) for maintenance only

## Optional

TALLY/GPI, RS-422 (MKS-X1700)	D-sub 25-pin (x2), open collector outputs 32 ch, 3.3V TTL inputs 12ch RJ-45 (x4) for RS-422 (x8) via break out cables
-------------------------------	---

## System Format

4K	3840x2160/59.94P, 3840x2160/50P, 3840x2160/29.97P *3, 3840x2160/23.98P *3
HD	1080/59.94P, 1080/50P, 1080/29.97PsF *3, 1080/23.98PsF *3, 1080/59.94i, 1080/50i, 720/59.94P

## Notes

\*1 The specifications are for a single unit of MLS-X1. When a system is configured with multiple MLS-X1s, number of inputs and outputs increase. Available inputs and

outputs numbers are defined by the switcher configuration and the signal format.

\*2

Reference output is available only when a single unit of MLS-X1 is used alone.

\*3

These formats are planned to be supported by future software upgrade.

## Related products



### **XVS-G1**

Powerful and Compact Live Production Switcher



### **MKS-R3210**

32 Button remote control panel



### **MKS-R1620**

16 Button remote control panel



### **ICP-X7000**

Control panel for MLS-X1 and XVS series switchers



### **M2L-X**

M2L-X Software-Based Live Production Switcher

## Gallery

