

## RCP-1530

Joystick type of Remote control panel for HDC/HSC/HXC series cameras. 5 units in 19-inch EIA rack.



### Overview

The RCP-1530 incorporates an LCD display with a touch panel, and a variety of settings are available to make this remote control panel compare favorably with the MSU. It is multifunctional while at the same time having a slim body that is just 80 mm wide, which allows you to mount up to five units in a 19-inch EIA rack. The iris and master black adjustment block employs joystick type control.

### Features

#### **Touch panel and many direct access switches suitable for various camera operations.**

This remote control panel is provided with the control functions required to perform various camera operations. The operation buttons, adjustment knobs, and other controls are arranged on the panel according to function and frequency of use. Guard frames are provided around buttons that are vital to the operation and setup of cameras to prevent the buttons from being unintentionally operated.

#### **Ethernet connection capability**

It is possible to connect by LAN cable in addition to connecting using CCA-5 cable. Therefore, when setting up a multi-camera control system, not only can a system be built using the CNU-700 as previously, but a system can also be built using a LAN.

#### **Newly added narrow design**

It is just 80 mm wide, which allows you to mount up to five units in a 19-inch EIA rack

#### **Customisable switch and menu.**

User's can assign any function to a spare switch and also make their own favourite menu as well.

#### **Building of a variety of control systems**

HDC/HSC/BVP user's can build a multi-camera control system through the use of the CNU-700. In a system that uses CNU-700s, two CNU's can be used to control a camera system of up to 24 cameras. A system that uses a LAN can also be built by connecting to a LAN-compatible CCU.

### Specifications

#### General

Power supply	DC 10.5 V to 30 V
Power consumption	DC 10.5 V to 30 V
Operating temperature	5 °C to 40 °C (41 °F to 104 °F)

## General

Dimensions (W x H x D)  
(excluding protrusions)

80 × 310 × 125 mm (3 1/4 × 12 1/4 × 5 in)

Mass

1.6 kg (3 lb. 8 oz.)

## Input/output connectors

Ethernet

RJ-45 8-pin (X1)

CCU/CNU

Multi-connector 8-pin, female (x1)

EXT I/O

D-sub 9-pin, female (x1)

## Related products



### BRC-H800

Premium Full HD PTZ  
Camera with 12x optical  
zoom and uncompromising  
broadcast picture quality



### BRC-H900

Full HD robotic studio  
camera with 1/2-type Exmor  
3CMOS sensor and 14x  
optical zoom



### HXC-FB80

Three 2/3-inch Exmor™  
CMOS sensor HD colour  
studio camera



### MSU-3000


Master setup unit, multi  
camera remote control  
panel for system cameras  
(horizontal type)



### MSU-3500

Master setup unit, multi  
camera remote control  
panel for system cameras  
(vertical type)

## Gallery

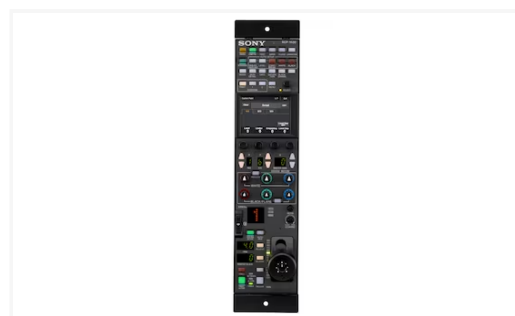

specifications are subject to change without notice. The values for mass and dimension are approximate. All trademarks are the property of their respective owners.